

Field Tile Sizes



Beige - BEI
FLOTITBEI636 - 6"x36" Non-Rectified Field Tile - Matte



Grey - GRE
FLOTITGRE636 - 6"x36" Non-Rectified Field Tile - Matte



Camel - CAM
FLOTITCAM636 - 6"x36" Non-Rectified Field Tile - Matte



Noce - NOC
FLOTITNOC636 - 6"x36" Non-Rectified Field Tile - Matte




Titus 2.0

Glazed Porcelain


Photo Features 6"x36" Non-Rectified Field Tile - Matte in Beige.

SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		FLOTIT...636	6"x36"	Non-Rectified Field Tile - Matte	14	21.00


ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	4	Unaffected	6	≥ 400 lbf	≤ 0.5%	Unaffected




APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	•	◻	◻	•	◻	◻
Commercial	•	◻	◻	•	◻	◻

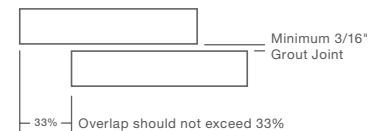

LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

