


12"x12" Mosaic Tile - Honed



Bianco - BIA
DECBLOBIA1212MO



Grigio - GRI
DECBLOGRI1212MO

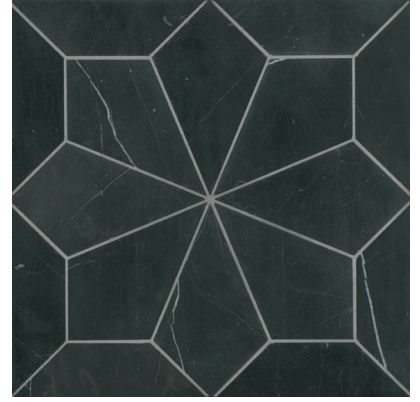

Nero - NER
DECBLONER1212MO



Blomma

Decorative (Stone)

Photo Features 12" x 12" Mosaic Tile - Honed in Nero.


SIZING & PACKAGING

| Type | Shape | Item Code | Size | Description | Pcs / Ctn | Sf / Ctn |
|--------|---|-----------------|---------|---------------------|-----------|----------|
| Mosaic |  | DECBLO***1212MO | 12"x12" | Mosaic Tile - Honed | 10 | 9.81 |

ANSI TECHNICAL SPECIFICATIONS

| | Abrasion Resistance | Water Absorption | Average Bulk Specific Gravity | Compressive Strength Perpendicular (Dry) | Flexural Strength Perpendicular (Dry) | Modulus Rupture Perpendicular (Dry) |
|---------|---------------------|------------------|---|--|---------------------------------------|-------------------------------------|
| Results | 11.98 lw | 0.16 | 167.28 lbs/ft ³ 2,680.6 kg/m ³ | 13,000 psi | 1,340 psi | |

Shade Variation



APPLICATIONS

| | Floors | Walls | Countertops | Shower Floors | Shower Walls | Pools/Spas |
|-------------|--------|-------|-------------|---------------|--------------|------------|
| Residential | ● † | ◻ | ◻ | ● † | ◻ | |
| Commercial | ● † | ◻ | ◻ | ● † | ◻ | |

LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only

Stone testing data are averages for this stone type.

White or translucent marbles may rust and/or discolor over time when exposed to continuous moisture or water. Use of a penetrating sealer is recommended.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Natural stone has inherent variation in color/shade, size, texture, finish, veining, grain, movement and pitting. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Ensure proper installation, application, use, care and maintenance. Natural stone must be sealed prior to installation. Do not use aerosol catalyst adhesives. Only use pH neutral cleaners. Natural stone may experience changes in color and finish if installed in an exterior application. There is no warranty for natural stone. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

