





White Carrara/White Thassos
100001716
Mosaic Blend - Honed
(14 1/4"x14 1/4" Sheet)



White Carrara/Bardiglio
100001717
Mosaic Blend - Honed
(14 1/4"x14 1/4" Sheet)

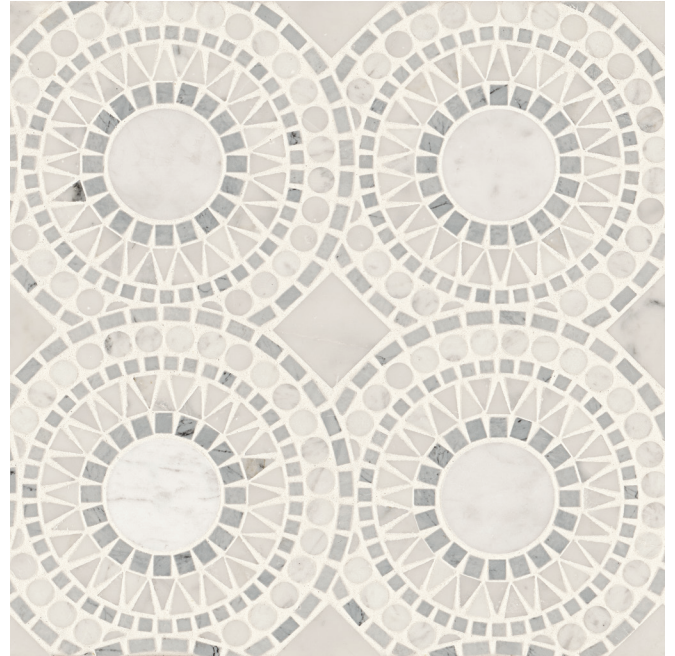

Myra Beige/Basalt
100001719
Mosaic Blend - Honed
(14 1/4"x14 1/4" Sheet)

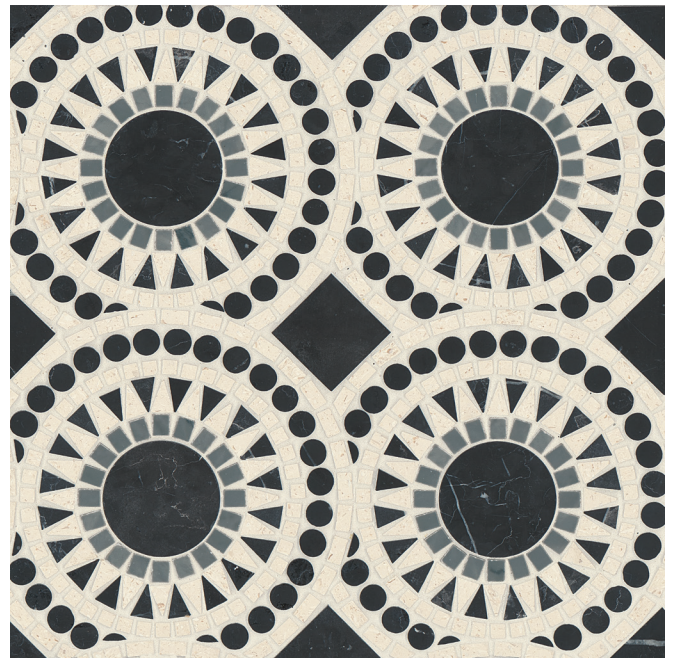

Nero Marquina/Bardiglio/Myra Beige
100001718
Mosaic Blend - Honed
(14 1/4"x14 1/4" Sheet)



Solis

Decorative (Stone Blend Mosaics)

Photo Features Mosaic Blend - Honed in Myra Beige/Basalt.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Mosaic		100001719	14 1/4"x14 1/4" Sheet	Mosaic Blend - Honed in Myra Beige/Basalt	5	7.05
		100001718	14 1/4"x14 1/4" Sheet	Mosaic Blend - Honed in Nero Marquina/Bardiglio/Myra Beige	5	7.05
		100001717	14 1/4"x14 1/4" Sheet	Mosaic Blend - Honed in White Carrara/Bardiglio	5	7.05
		100001716	14 1/4"x14 1/4" Sheet	Mosaic Blend - Honed in White Carrara/White Thassos	5	7.05

ANSI TECHNICAL SPECIFICATIONS

	Abrasion Resistance	Water Absorption	Average Bulk Specific Gravity	Compressive Strength Perpendicular (Dry)	Flexural Strength Perpendicular (Dry)	Modulus Rupture Perpendicular (Dry)
Results	11.98lw	0.16	167.28 lbs/ft ³ 2,680.6 kg/m ³	13,000 psi	1,340 psi	1,500 psi

Shade Variation



APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	● †	☐	☐	● †	☐	
Commercial	● †	☐	☐	● †	☐	

LEGEND

- ☐ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ∅ Applications & ANSI Technical Specifications do not apply
- * Special Order only

Please be aware that white stones installed on shower floors may experience oxidization and rusting.

All natural stone products must be sealed prior to grouting.

Do not use chlorine, acids, or other harsh chemicals to clean. All spills must be cleaned immediately to prevent staining.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Natural stone has inherent variation in color/shade, size, texture, finish, veining, grain, movement and pitting. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Ensure proper installation, application, use, care and maintenance. Natural stone must be sealed prior to installation. Do not use aerosol catalyst adhesives. Only use pH neutral cleaners. Natural stone may experience changes in color and finish if installed in an exterior application. There is no warranty for natural stone. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

100002557
REV. 3/2022

bedrosians.com

